


DM-FW15A

15.6" DM-F IP65 工业显示器

Features

- » 坚固耐用的 IP65 铝前挡板
- » 用于无缝面板安装的美观超薄挡板
- » DC 输入
- » DP/VGA 灵活视频输入解决方案
- » PCAP AG 涂层触摸
- » 宽温度支持

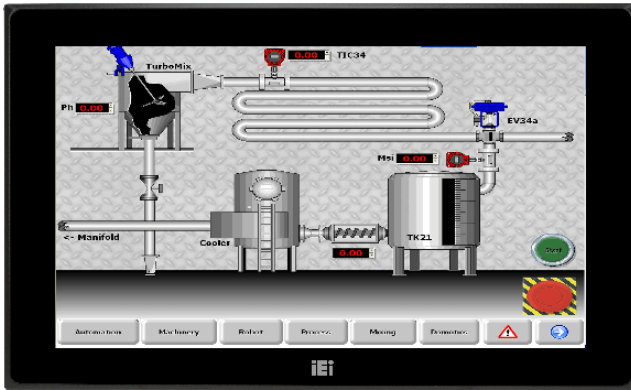

Specifications

显示	
背光 MTBF(hrs)	50000
亮度(cd/m2)	400
对比度	500:1
LCD 尺寸	15.6" (16:9)
分辨率上限	1366 (W) X 768 (H)
运行环境	
湿度	10% to 95% (non-condensing)
IP 等级	IP 65 compliant front panel
操作温度	-20°C ~ 60°C
存储温度	-20°C ~ 70°C
LCD	
LCD 颜色	16.2M
像素间距 (mm)	0.252 x 0.252
可视角度 (H-V)	170° / 160°
物理特性	
切口尺寸	379.1 x 232.3
尺寸 (LxWxH) (mm)	400.1 x 253.3 x 52.9
电源	
电源适配器	9V~36V DC
触摸	
触摸控制器	EETI EXC3 series
触摸屏	10-point projected capacitive touch window
重量	
重量	4 / 6.5
I/O 接口	
I/O 接口	1 x DC Input Jack(9~36V (Lockable))
	1 x Display Port
	1 x HDMI™

	1 x Power In(9V-36V terminal block)
	1 x USB 2.0(touch)
	1 x VGA

Ordering Information

DM-FW15A/PC-R21	15.6" 400 cd/m ² 1366x768 LCD monitor, Aluminum front panel, Black color, W/ USB PCAP touch screen, 9 ~36V DC input, Powder paint, R21
-----------------	---------------------------------------------------------------------------------------------------------------------------------------------------

Packing List

1 x USB 线	1 x VGA 线
-----------	-----------