


ICE-DB-T6

Baseboard for COM Express Type 6 Module

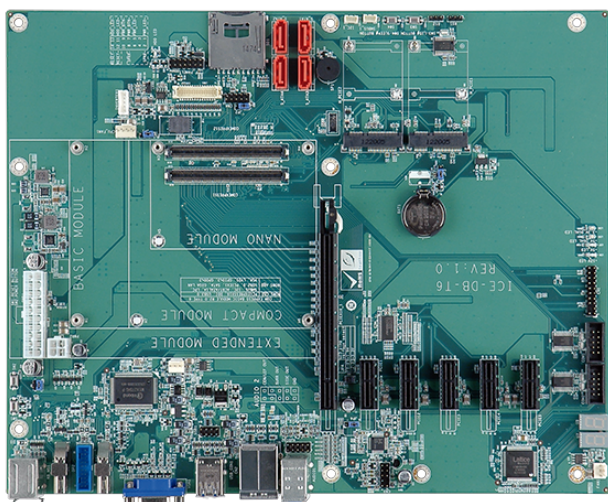

Features

- » Intel® 22nm Atom™ or Celeron® on-board SoC supported
- » Intel® HD Graphics Gen7 integrates high-performance graphics and media processing
- » Supports 1333/1066 MHz DDR3L (1.35V) memory, up to 8 GB
- » Supports one analog CRT, one 24-bit dual-channel LVDS, and one DDI
- » Optional soldered down 4 GB SSD
- » IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

Physical Characteristics	
Dimensions (LxWxH) (mm)	304.8 X 243.8
Net Weight	450g
Storage	
Storage	4 x SATA
	1 x SD/MicroSD card
I/O Interface	
Display Output	1 x VGA
	3 x Display Port :2 x real connectors, 1 x pin header
	1 x LVDS :18/24-bit single/dual-channel
Ethernet	1 x LAN
Audio	Description: Realtek ALC892 HD Audio codec
	1 x Line in
	1 x Line out
	1 x Mic
	1 x Front Audio :2x5 pin
I/O Interface	2 x Internal RS-232
	4 x External USB 3.2 Gen1x1
	1 x PS/2
Expansion	1 x PCIe x16
	6 x PCIe x1
	2 x PCIe mini Card Slot :with USB
Other Features	
TPM	2x10 pin
Power	
Power Supply	Support AT/ATX mode
Environment	
Operating Temperature	-10°C ~ 60°C
Storage Temperature	-20°C ~ 70°C
Humidity	5% ~ 95%, non-condensing
Certifications	

Safety & EMC	CE/FCC compliant
--------------	------------------

Ordering Information

ICE-DB-T6-R10	Base Board for COM Express Type 6 Module
---------------	--